DORUK-20-S (5 rows shelves + Base)

OPEN MERCHANDISERS

Remote Open Merchandiser

Standard features

- 5 rows shelves + Base
- Thermostat Electronic Control
- Externally Equalized TXV
- Manual Night Curtain
- Price Tag Holder in Front of Base Tray
- Aluminium Profile Air Return Grills
- Mirrored side wall right/left or Glass Sides
- LED Lights
- 4000k bar led for top canopy
- 4000k bar led for undershelf lighting
- Steel Shelves with Front Glass Stoppers
- PVC labelling Profiles
- Dixell thermostat with 2 Probes
- Wellington ERC2 electronic fan motor
- Multiplexing
- Stainless Steel Wet Surfaces, Fan Sheet and Evaporator Cover
- Epoxy Coated Evaporator
- Stainless Steel Evaporator Box with Heating Element and Evaporator Cover
- Electrostatic Powdered Paint For Both Interior-Exterior (choice of colors Black or White)

Dimensions

890

Model	DORUK-20-S1A-4	DORUK-20-S1A-6	DORUK-20-S1A-8	DORUK-20-S1A-10	DORUK-20-S1A-12
Length (inches)	49"	74"	98"	123"	148"
Depth (inches)	35"	35"	35"	35"	35"
Amperage	0.39A	0.56A	0.78A	0.95A	1.17A
Power	220V 60HZ	220V 60HZ	220V 60HZ	220V 60HZ	220V 60HZ
BTU/h per foot	1508	1508	1508	1508	1508
Evaporating	-5.5C	-5.5C	-5.5C	-5.5C	-5.5C

1000

Model	DORUK-20-S15A-4	DORUK-20-S15A-6	DORUK-20-S15A-8	DORUK-20-S15A-10	DORUK-20-S15A-12
Length (inches)	49"	74"	98"	123"	148"
Depth (inches)	39.5"	39.5"	39.5"	39.5"	39.5"
Amperage	0.39A	0.56A	0.78A	0.95A	1.17A
Power	220V 60HZ	220V 60HZ	220V 60HZ	220V 60HZ	220V 60HZ
BTU/h per foot	1508	1508	1508	1508	1508
Evaporating	-5.5C	-5.5C	-5.5C	-5.5C	-5.5C

1100

Model	DORUK-20-S2A-4	DORUK-20-S2A-6	DORUK-20-S2A-8	DORUK-20-S2A-10	DORUK-20-S2A-12
Length (inches)	49"	74"	98"	123"	148"
Depth (inches)	43.5"	43.5"	43.5"	43.5"	43.5"
Amperage	0.39A	0.56A	0.78A	0.95A	1.17A
Power	220V 60HZ	220V 60HZ	220V 60HZ	220V 60HZ	220V 60HZ
BTU/h per foot	1508	1508	1508	1508	1508
Evaporating	-5.5C	-5.5C	-5.5C	-5.5C	-5.5C

Above mentioned measurement are from internal part of the equipment. Side panel will be extra Add approximately 2" each side for side panel thickness.

Technical Drawings

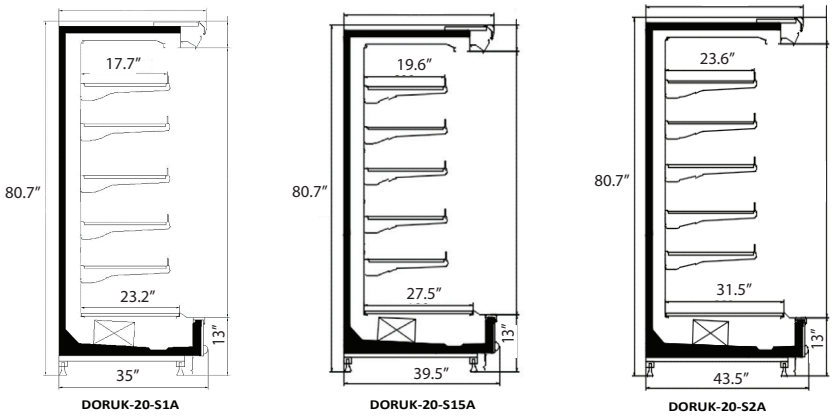

* Customizable options available; * Multiple shelves available; * All measurements are approximates; * Specifications are subject to change without notice; * Equipment are designed to operate in a controlled environment below 75°F (+24°C) temperature and HR 55% relative humidity.